

Joya™ X2 Single Slot Dock

The Joya Single Slot Dock paired with one Joya X2 mobile computer builds a reading system for the collection, decoding and transmission of barcoded data.

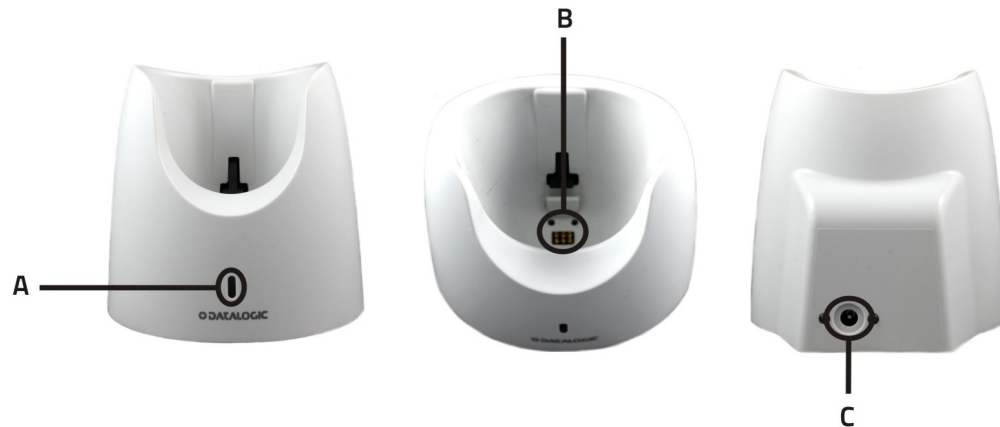


Figure 1 - Joya X2 Single Slot Dock

- A. LED Indicator
- B. Mobile Computer Contacts
- C. Power Jack

MOBILE COMPUTER INSERTION/ REMOVAL



Figure 2 - Joya X2 Battery Charging

LED INDICATOR

The LED positioned on the front part of the Joya X2 Single Slot Dock indicates the dock battery charger status.



Figure 3 - LED Indicator

LED STATUS	
Red costant	Battery charging ¹
Green costant	Battery charge completed

1. During charging, the red LED may turn off, while the green LED may turn on, to indicate a temporary suspension.

TECHNICAL FEATURES

JOYA X2 SINGLE SLOT DOCK	
Electrical Features	
Power Supply ¹	From 5 VDC \pm 5%
Consumption	Max. 1.2 A
Indicator	Battery charge LED (bi-colored)
Charge Time	2300 mAh Battery: max. 5 hours
Environmental Features	
Working Temperature ²	0° to +40 °C (+32° to +104 °F)
Storage Temperature	-20° to +70 °C (-4° to +158 °F)
Humidity	90% non condensing
Mechanical Features	
Dlmsions	107 X 92 X 108 mm (4.21 X 3.62 X 4.25 in)
Weight	320 g (11.29 oz)

1. Recommended power supply: 94ACC1381 (included in the box). Use of any other power supply voids all certifications and warranties.
2. Battery must be charged at a temperature ranging from 0° to +30 °C (+32° to +86 °F).

©2015 Datalogic ADC S.r.l. ■ ALL RIGHTS RESERVED. ■
Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U.
Joya is a trademark of Datalogic ADC S.r.l. and the Joya logo is a registered trademark of Datalogic ADC S.r.l. in the U.S.A. and the E.U.

