

MV-SC3050M

5 MP 1/1.7" Vision Sensor



Introduction

With built-in positioning and measurement algorithms, MV-SC3050M vision sensor can detect object's existence, quantity, location, etc. It can be monitored and operated via the SCMVS client. It can output results via RS-232 and Ethernet, and cooperate with other processes via IO. The vision sensor supports multiple result output methods and customized result text output.

Key Features

- Adopts embedded hardware platform for high-speed image processing.
- Adopts built-in positioning and measurement algorithms to object's existence, quantity, location, etc.
- Multiple IO interfaces for input and output signals.
- Multiple indicators for displaying device status.
- Adopts light source to ensure uniform brightness in the illuminated area.
- Supports multiple communication protocols, including Serial Port, TCP, UDP, FTP, Profinet, Modbus, etc.


Available Model

- 8 mm focal length:
MV-SC3050M-08M-WBN
- 12.4 mm focal length:
MV-SC3050M-12M-WBN
- 16 mm focal length:
MV-SC3050M-16M-WBN

Applicable Industry

Consumer electronics, food and medical industry, automobile, etc.

Dimension

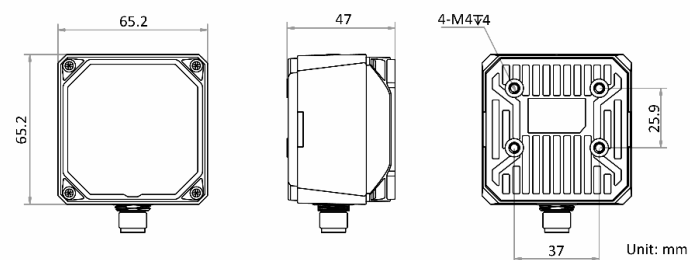


Specification

Model	MV-SC3050M-08M-WBN	MV-SC3050M-12M-WBN	MV-SC3050M-16M-WBN
Tool			
Vision tool	<ul style="list-style-type: none">● Count: Pattern count, spot count, edge count● Defect detection: Exception detection● Existence: Pattern existence, spot existence, edge existence, circle existence, line existence● Location: Match location, match calibration● Logic tool: If module, condition judge, logic judge, combination judge, character comparison, calculator● Measurement: L2L angle, diameter measurement, brightness average value, contrast measurement, width measurement, P2L measurement, greyscale size, line angle, edge width measurement● Recognition: OCR, code recognition		
Solution capacity	Supports solution importing and exporting, up to 32 solutions and 40 modules can be stored.		
Communication protocol	Serial Port, TCP, UDP, FTP, Profinet, Modbus, Ethernet/IP		
Camera			
Sensor type	CMOS, global shutter		
Pixel size	3.2 μm × 3.2 μm		
Sensor size	1/1.7"		
Resolution	2368 × 1670		
Max. frame rate	30 fps		
Dynamic range	71.4 dB		
SNR	41 dB		
Gain	0 dB to 18 dB		
Exposure time	16 μs to 1 sec		
Pixel format	Mono 8		
Mono/color	Mono		
Electrical features			
Data interface	Fast Ethernet		
Digital I/O	17-pin M12 connector provides power, Ethernet, digital I/O, and serial port: Input signal × 2 (Line 0/1), output signal × 3 (Line 5/6/7), bi-directional I/O × 3 (Line 2/3/4), and external button input × 1. Output signal can be set as NPN or PNP.		
Power supply	24 VDC		
Max. power consumption	Approx. 48 W@24 VDC		
Mechanical			
Lens mount	M12-mount, mechanical autofocus lens		
Focal length	8 mm (0.3")	12.4 mm (0.5")	16 mm (0.6")
Lens cap	Transparent lens cap. Polarization or infrared filter lens cap is optional.		
Light source	White light by default. Red/blue/near-infrared is optional.		
Indicator	Power indicator (PWR), network indicator (LNK), status indicator (STS), result indicator (OK/NG)		
Dimension	65.2 mm × 65.2 mm × 47 mm (2.6" × 2.6" × 1.9")		
Weight	Approx. 280 g (0.6 lb.)		
Ingress protection	IP67 (under proper installation of lens and wiring)		
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
Humidity	20% to 95% RH, non-condensing		

General	
Client software	SCMVS
Certification	CE, FCC, KC

Detection Range

Lens focal length	Installation distance	Field of view	Single pixel accuracy
8 mm (0.3")	25 mm (1.0")	23.68 mm × 17.6 mm (0.9" × 0.7")	0.01 mm
	3000 mm (118.1")	2841.6 mm × 2112 mm (111.9" × 83.1")	1.2 mm
12.4 mm (0.5")	60 mm (2.4")	37.89 mm × 28.16 mm (1.5" × 1.1")	0.016 mm
	3000 mm (118.1")	1894.4 mm × 1408 mm (74.6" × 55.4")	0.8 mm
16 mm (0.6")	90 mm (3.5")	42.62 mm × 31.68 mm (1.7" × 1.2")	0.018 mm
	2000 mm (78.7")	947.2 mm × 704 mm (37.3" × 27.7")	0.4 mm

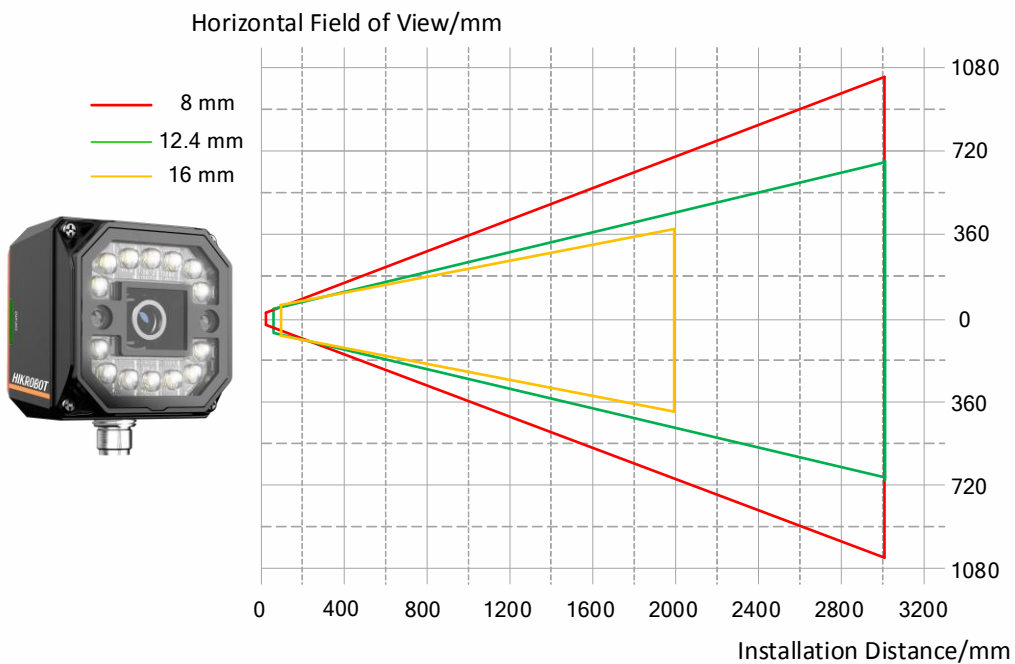

HIKROBOT

Hangzhou Hikrobot Technology Co.,Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com