

MV-SC7016PC

1.6 MP Smart Camera




Introduction

MV-SC7016PC smart camera is developed based on high-performance embedded platform. It adds vision algorithms like character recognition, object recognition, object sorting, etc. after integrating general vision algorithms. With mechanical autofocus function, the smart camera can meet different scenario demands. It can be easily configured and operated via the SCMVS client software, and uses Ethernet to output vision tool results and customized results.

Available Model

- 12 mm focal length: MV-SC7016PC-12S-WBN
- 16 mm focal length: MV-SC7016PC-16S-WBN

Dimension

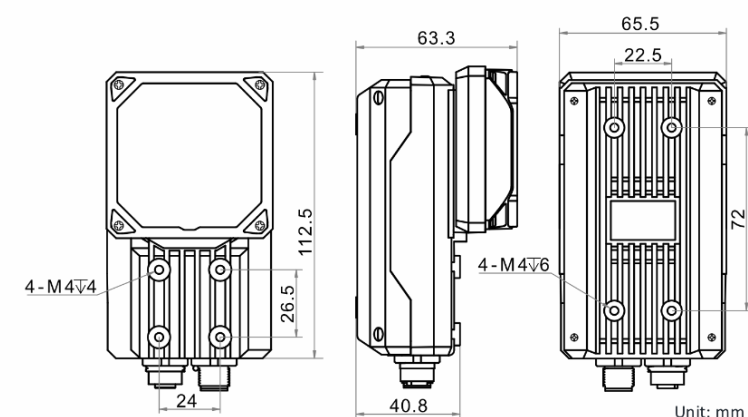

Key Feature

- Built-in deep learning algorithms to achieve character and object recognition, object sorting, etc.
- Integrates general vision algorithms to achieve location, measurement, recognition, etc.
- Supports mechanical autofocus function to achieve fast debugging and configuration.
- Big memory and storage support image savings in loop with high performance.
- Adopts multiple I/O interfaces for controlling.
- Supports multiple communication protocols.
- Supports indicators displaying device status.

Applicable Industry

Consumer electronics, food and beverage, pharmaceutical, automobile, etc.




Specification

| Model | MV-SC7016PC-12S-WBN | MV-SC7016PC-16S-WBN |
|------------------------|---|---------------------|
| Tool | | |
| Vision tool | <ul style="list-style-type: none">● Count: Pattern count, spot count, edge count● Defect detection: Exception detection● Existence: Pattern existence, spot existence, edge existence, circle existence, line existence● Location: Match location, match calibration● Logic tool: If module, condition judge, logic judge, combination judge, string comparison, calculator● Measurement: Color size, L2L angle, diameter measurement, brightness analysis, contrast measurement, width measurement, P2L measurement, greyscale size, line angle, edge width measurement● Recognition: Color recognition, color contrast, OCR, code recognition, DL classification, DL object detection | |
| Solution capacity | Supports solution importing and exporting, up to 32 solutions and 40 modules can be stored. | |
| Communication protocol | RS-232, TCP, UDP, FTP, Profinet, ModBus, EtherNet/IP | |
| Camera | | |
| Sensor type | CMOS, global shutter | |
| Pixel size | 3.45 μm × 3.45 μm | |
| Sensor size | 1/2.9" | |
| Resolution | 1408 × 1024 | |
| Max. frame rate | 60 fps | |
| Gain | 0 dB to 15 dB | |
| Exposure time | 16 μs to 1 sec | |
| Pixel format | Mono 8, RGB 8 | |
| Mono/color | Color | |
| Platform | | |
| Memory | 8 GB | |
| Storage | 32 GB | |
| Electrical feature | | |
| Data interface | Gigabit Ethernet interface | |
| Digital I/O | 12-pin M12 connector provides power and I/O, including opto-isolated input (Line 0/1/2) × 3, opto-isolated output (Line 3/4/5) × 3, and RS-232 × 1 | |
| Power supply | 24 VDC | |
| Power consumption | Approx. 8.5 W@24 VDC (light source disabled) Approx. 46 W@24 VDC (light source enabled) | |

| Mechanical | | |
|--------------------|---|--------------|
| Lens mount | M12-mount, mechanical autofocus supported. | |
| Focal length | 12 mm (0.5") | 16 mm (0.6") |
| Lens cap | Transparent lens cap. Half polarization or full polarization lens cap is optional. | |
| Light source | White light. Red, blue, or NIR light is optional. | |
| Indicator | Power indicator (PWR), network indicator (LNK/ACT), and user-defined indicator (U1/U2). | |
| Dimension | 112.5 mm × 65.5 mm × 63.3 mm (4.4" × 2.6" × 2.5") | |
| Weight | Approx. 450 g (1.0 lb.) | |
| Ingress protection | IP67 | |
| Temperature | Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F) | |
| Humidity | 20% to 95% RH, non-condensing | |
| General | | |
| Client software | SCMVS | |
| Certification | CE, FCC, KC | |

Detection Range

| Lens focal length | Installation distance | Field of view | Single pixel accuracy |
|-------------------|-----------------------|---|-----------------------|
| 12 mm (0.5") | 60 mm (2.4") | 24.29 mm × 17.66 mm (1.0" × 0.7") | 0.017 mm |
| | 3000 mm (118.1") | 1214.4 mm × 883.2 mm (47.8" × 34.8") | 0.863 mm |
| 16 mm (0.6") | 90 mm (3.5") | 27.32 mm × 19.87 mm (1.1" × 0.8") | 0.019 mm |
| | 2000 mm (78.7") | 607.2 mm × 441.6 mm (23.9" × 17.4") | 0.431 mm |

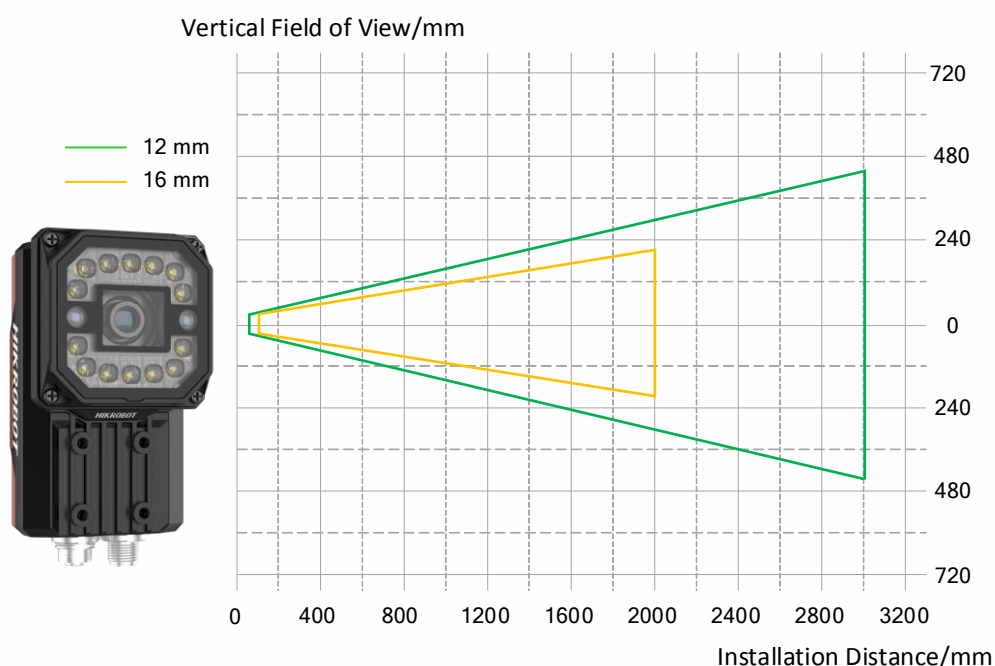

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.